



KONICA MINOLTA

# bizhub 25e

✓ Black & white A4 multifunctional

✓ Up to 25 pages per minute

## Functionality



Copying

– Black & white



Printing

– Black & white  
– GDJ/PCL/PS  
– Local/Network  
– USB




Scanning

– Colour  
– Black & white  
– Scan-to-eMail  
– Scan-to-SMB  
– Scan-to-FTP  
– Scan-to-USB  
– TWAIN local/  
Network



Faxing

– Super G3 Fax  
– PC-Fax  
– i-Fax

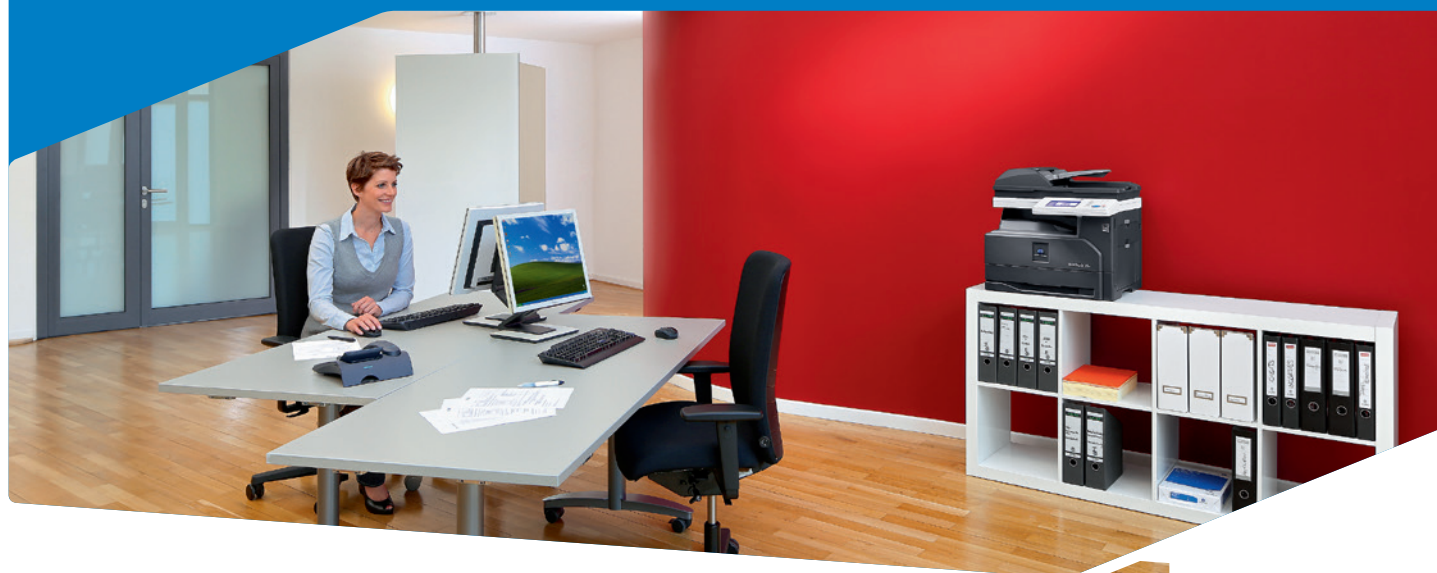


Giving Shape to Ideas

**Technology**

Emperon™ – print controller	Easily compatible to users and IT environments thanks to Konica Minolta unified print technology	X
Simitri® HD – polymerised toner	Reduces your budget while delivering high quality and low environmental impact	X
OpenAPI – solution platform	Enable efficient workflows throughout your MFP fleet by server-based applications	X
i-Option – special feature	Increase the scope of MFP functionality from basic to advanced depending on your needs	X
CSRC – remote service	Keep productivity up by online device and consumable monitoring by the Konica Minolta service	✓
IWS – panel customisation	Improved user-device interaction and productivity by full MFP panel customisation to your needs	X

**Option diagram**

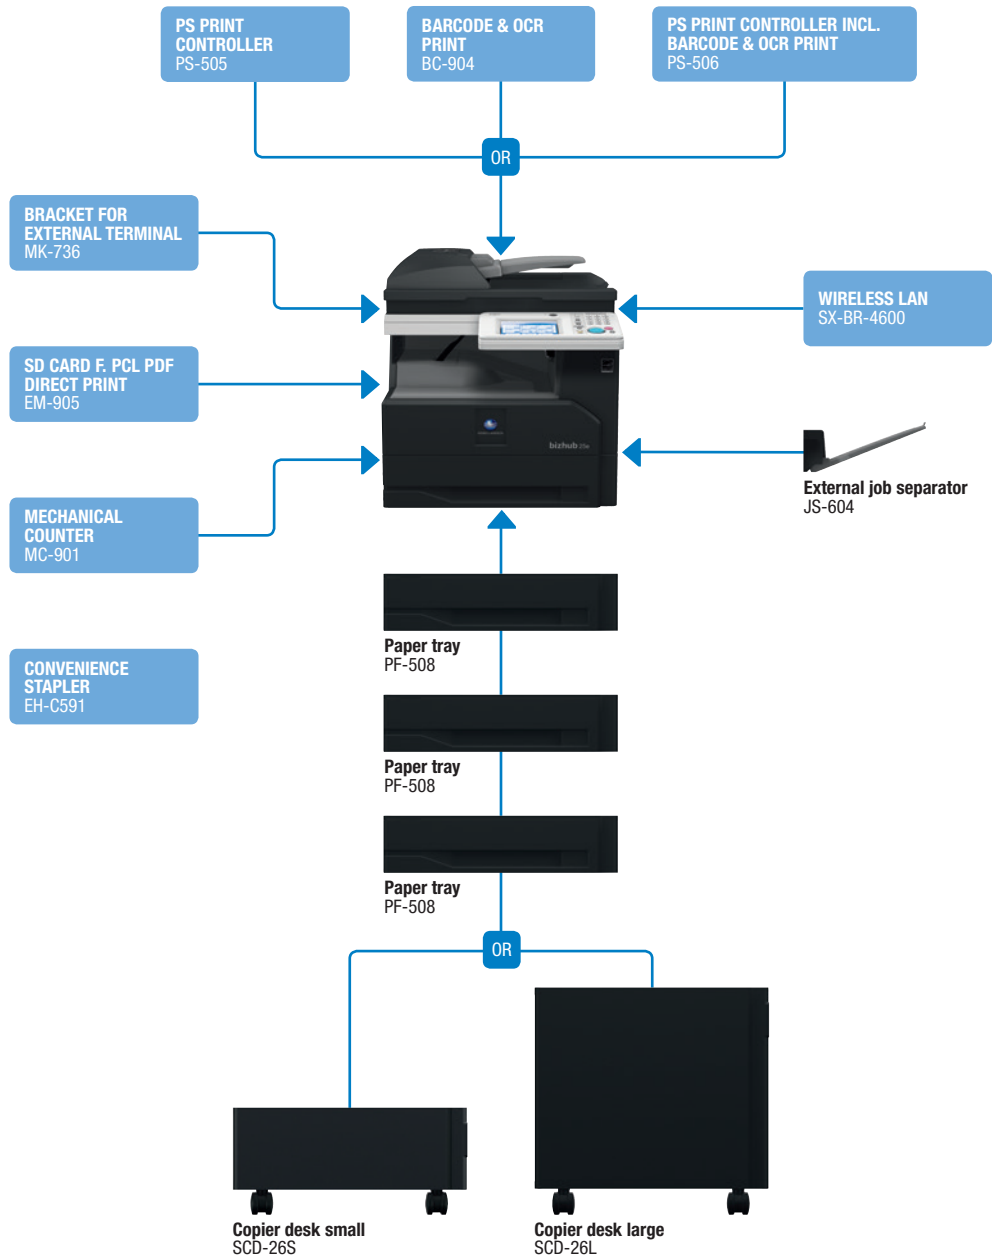

**Finishing options**



Duplex

## Descriptions

<b>bizhub 25e</b>	Multifunctional black & white device (print, copy, scan, fax) with 25 ppm. Standard network functionality. GDI and PCL print. Reverse document feeder standard. Standard duplex unit. Standard paper capacity of 600 sheets.
<b>PF-508 Paper tray</b>	A4, 500 sheets, up to 80 gsm; up to 3 can be installed
<b>SCD-26S Copier desk small</b>	Provides storage space for print media, etc., in case 2 or 3 PF-508 are installed
<b>SCD-26L Copier desk large</b>	Provides storage space for print media, etc., in case 0 or 1 PF-508 is installed
<b>JS-604 External job separator</b>	Additional output tray, separation for fax output etc.
<b>PS-505 PS print controller</b>	PostScript 3 printing
<b>BC-904 Barcode &amp; OCR print</b>	Barcode and OCR font printing

<b>PS-506 PS print controller incl. Barcode &amp; OCR print</b>	PostScript 3 printing including Barcode and OCR font printing
<b>EM-905 SD card for PCL PDF direct print</b>	SD card memory extension, enables PCL PDF direct printing
<b>MC-901 Mechanical counter</b>	Mechanical counter
<b>MK-736 Bracket for external terminal</b>	Required to install external accounting terminal
<b>SX-BR-4600 Wireless LAN</b>	Wireless LAN to network connector
<b>EH-C591 Convenience stapler</b>	External stapler, convenient stapling of up to 50 sheets

## Technical specifications

### SYSTEM SPECIFICATIONS

<b>System memory</b>	512 MB + 128 MB SD card
<b>Interface</b>	10-Base-T/100-Base-TX; USB 2.0
<b>Network protocols</b>	TCP/IP (IPv4, IPv6); IPP, SNMP, HTTP, HTTPS
<b>Frame types</b>	Ethernet II
<b>Automatic document feeder</b>	Up to 80 originals; A5–A4; 35–128 gsm Reversing automatic document feeder
<b>Printable paper size</b>	A6–A4, customised paper sizes (90–216 x 140–356 mm)
<b>Printable paper weight</b>	60–160 gsm
<b>Paper input capacity</b>	Standard: 600 sheets Max.: 2,100 sheets
<b>Tray 1</b>	500 sheets, A5–A4, 60–90 gsm
<b>Tray 2–4 (optional)</b>	500 sheets each, A5–A4, 60–90 gsm
<b>Manual bypass</b>	100 sheets, A6–A4, customised paper sizes (90–216 x 140–356 mm), 60–160 gsm
<b>Automatic duplexing</b>	A6–A4; 60–90 gsm
<b>Output capacity</b>	Std.: 250 sheets Max.: 350 sheets (incl. optional external job separator)
<b>Copy/print volume (monthly)</b>	Rec.: 5,000 pages; Max. <sup>1</sup> : 10,000 pages
<b>Toner lifetime</b>	Up to 20,000 pages
<b>Drum lifetime</b>	Up to 42,000 pages
<b>Power consumption</b>	220–240 V / 50/60 Hz Less than 1.09 kW
<b>System dimensions (W x D x H)</b>	520 x 513 x 509 mm
<b>System weight</b>	Approx. 24.1 kg

### COPIER SPECIFICATIONS

<b>Copying process</b>	Electrostatic LED copy, mono component
<b>Toner system</b>	Polymerised toner
<b>Copy/print speed A4</b>	Up to 25 ppm
<b>Autoduplex speed A4</b>	Up to 10 ppm
<b>1st copy out time</b>	5 sec.
<b>Warm-up time</b>	Approx. 12 sec. <sup>2</sup>
<b>Copy resolution</b>	600 x 600 dpi
<b>Multi copy</b>	1–99
<b>Gradation</b>	256 gradations
<b>Original format</b>	Max. A4
<b>Magnification</b>	25–400% in 1% steps
<b>Copy functions</b>	Duplex copy, electronic sorting, rotation copy, 2in1, 4in1, ID card copy, custom size settings

### PRINTER SPECIFICATIONS

<b>Print resolution</b>	600 x 600 dpi
<b>Page description language</b>	GDI PCL 5e/XL PostScript 3 (optional) PDF direct print (optional) Barcode and OCR fonts printing (optional)
<b>Operating systems</b>	Windows XP (32/64) Windows VISTA (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows Server 2003 (32/64) Windows Server 2008 (32/64) Windows Server 2008 R2 Windows Server 2012 Macintosh OS X 10.x Unix, Linux, Citrix SAP AS/400
<b>Printer fonts</b>	80 PCL Latin 136 PostScript 3 Emulation Latin (optional) 32 Barcode/OCR (optional)
<b>Print functions</b>	Duplex printing, cover sheet, electronic sorting, density adjustment, toner save mode, n-up, watermark (only PCL, PostScript 3), secure print

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

<sup>2</sup> Warm-up time may vary depending on the operating environment and usage

**SCANNER SPECIFICATIONS**

<b>Scan speed (mono/colour)</b>	Up to 40 opm Up to 27 opm
<b>Scan resolution</b>	Max.: 600 x 600 dpi
<b>Scan modes</b>	Scan-to-eMail Scan-to-SMB Scan-to-FTP Scan-to-USB TWAIN local/network
<b>File formats</b>	PDF, encrypted PDF, TIFF, JPEG
<b>Scan destinations</b>	1,030 (single + group); LDAP support

**FAX SPECIFICATIONS**

<b>Fax standard</b>	Super G3
<b>Fax transmission</b>	Analogue PC-Fax, i-Fax reception
<b>Fax resolution</b>	Max.: 406 x 392 dpi
<b>Fax compression</b>	MH; MR; MMR; JBIG
<b>Fax modem</b>	Up to 33.6 Kbps
<b>Fax destinations</b>	1,030
<b>Fax functions</b>	Time shift, automatic fax forwarding

**SYSTEM FEATURES**

<b>Security</b>	Mac address blocking; IP address blocking; SSL; HTTPS; encrypted PDF; user authentication; secure print
<b>Accounting</b>	Up to 100 user accounts; Active Directory 2003 support; user function access definition (user access control)
<b>Software</b>	PageScope Net Care Device Manager



- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



Visit our product page